

NSB 100FT Red Battery™

Specifically designed for **stable mains**



Red Star Technology™ is the latest breakthrough in battery performance, delivering **exceptionally long float life**.

- **Red Star Technology™** uses pure lead grid developed to provide exceptionally long float life for telecommunication applications under stable AC grid conditions
- 15 year float life at 20°C (68°F)
- Operating temperature range -40°C to +65°C
- Superior design float life at elevated temperature
- State-of-the-art automated manufacturing ensures consistency and reliability
- Advanced 3 stage terminal design to ensure leak-free operation
 - Female M8 brass terminals provide maximum performance
- High energy density
- High modulus Polyphenylene Oxide (PPO) plastic materials designed to withstand extended elevated operating temperatures and maintain high battery compression essential for reliable operation
 - Non-halogenated, thermally sealed plastic casing and cover
 - Flame retardant (UL 94 V0) and LOI of at least 28%
- Integral handles and front access terminals ensure ease of installation and maintenance
- EUROBAT design life definition: Long Life
- 2 year shelf life at 25°C (77°F)
- Approved as non-hazardous cargo for ground, sea, and air transport
 - DOT 49CFR173.159(d), (i) and (ii)

Visit our **website** to find out more www.powertech-group.com



Power Tech International Group
sales@powertech-group.com
www.powertech-group.com

NSB 100FT Red Battery™

Nominal Technical Specifications



Electrical

	International Standard 20°C (68°F)	North American Standard 25°C (77°F)
8 hour capacity to 1.75 VPC	98 Ah	100 Ah
10 hour capacity to 1.80 VPC	99 Ah	100 Ah
Float Voltage	2.29 +/- 0.02 Volts/Cell	2.27 +/- 0.02 Volts/Cell
Nominal Voltage	12 V	
Impedance (1kHz)	3.9 mΩ @ 25°C (77°F)	
Conductance	1,296 S	
Short Circuit Current	3,000 A	


Dimensions

Height	287 mm (11.3 in)	Weight	32 kg (70 lbs)
Width	108 mm (4.2 in)	Terminal	Female M8 x 1.25
Depth	396 mm (15.6 in)	Terminal Torque	8.0 Nm (71 in-lbs)

Ah Capacity Ratings @ 25°C (77°F)

Capacity Discharge / hours	1	2	4	8	10
Capacity @ 25°C /Ah	81	88	94	100	100
End of Discharge / VPC	1.70	1.75	1.75	1.75	1.80

Drawings

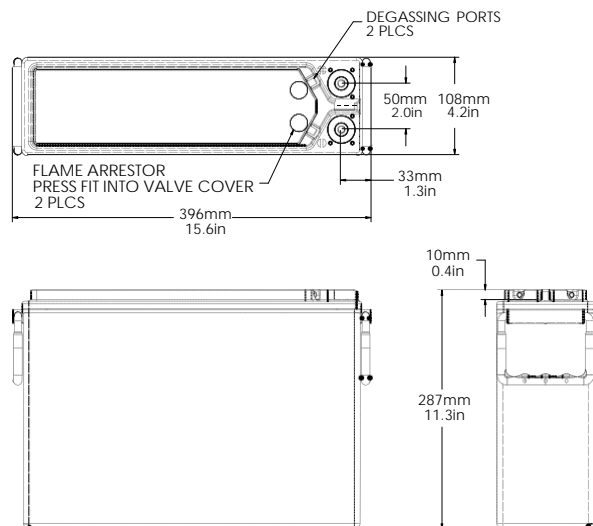

All NorthStar batteries are compliant with: Telcordia SR4228, Bellcore GR-63-Core, Issue 1; British, German, and Russian telecom standards; UL approved. NorthStar is registered to ISO 9001 and ISO 14001.

