



VRLA Battery **STB 100 FA**

Specifications


Nominal Voltage 12 V

Rated Capacity (20 °C)	20hr Rate (1,80V/cell)	10hr Rate (1,80V/cell)	5hr Rate (1,70V/cell)	1hr Rate (1,60V/cell)	
	112 Ah	100 Ah	94 Ah	67,2 Ah	
Dimensions (mm) & Weight (kg)	Length	Width	Height to terminal	Overall Height	Weight
	507 mm	110 mm	212 mm	227 mm	30 kg
Number / Type of Terminals 2 / M6					

Technical

Characteristics

Design Life at 20°C	12+ years
Eurobat Classification	Long Life
Internal Resistance (Fully charged - 20°C)	4,3 mΩ
Short-circuit current	2550 A
Max Charging Current	25 A
Min safe end Discharge Voltage	1,60 V/cell
Self discharge per month at 20°C	3%
Recommended Charging Voltage at 20°C	Stand-by use (V/cell): 2,25 to 2,30
	Cycle use (V/cell): 2,40 to 2,45
Container Material	ABS-UL94 FV0
Electrolyte Type	Sulfuric Acid
Type of plates / Alloy	Flat plates / Lead-Calcium-Tin alloy
Type of Separator	Absorbant Glass Mat
Valve Type / Operational Pressure	Rubber / 1-3 psi (70-200 mbar)
Operating Temperature Range	-20 to +50°C
Storage time at 20°C	9 months
Gas Collection System	Central Degassing on Request

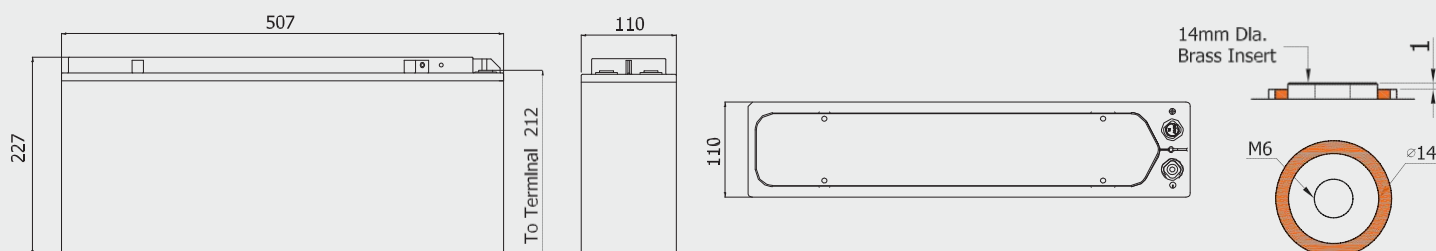

www.sunlight.gr



Power Tech International Group
 sales@powertech-group.com
 www.powertech-group.com